



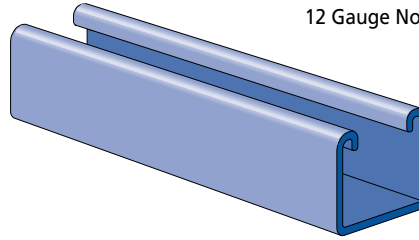

### P3000

Wt/100 Ft: 170 Lbs (253 kg/100 m)  
 Allowable Moment 3,870 In-Lbs (440 N•m)  
 12 Gauge Nominal Thickness .105" (2.7mm)

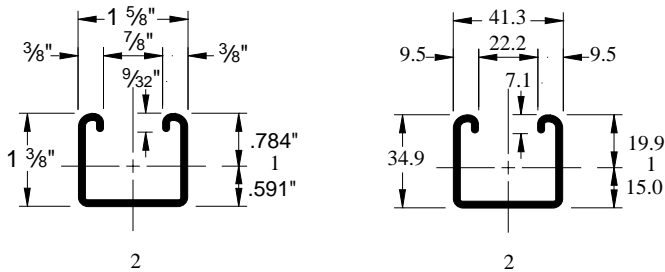

Channel Finishes:  
 PL, GR, HG, PG;  
 Standard Lengths:  
 10' & 20'

### COLUMN LOADING – P3000

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	3,070	9,790	9,090	8,190	7,370
36	2,730	8,300	7,370	6,320	5,440
48	2,400	7,000	6,010	4,930	4,050
60	2,090	5,930	4,930	3,860	3,120
72	1,820	5,060	4,050	3,120	2,290
84	1,590	4,300	3,390	2,430	**
96	1,400	3,690	2,880	1,860	**
108	1,200	3,220	2,290	**	**
120	1,040	2,820	1,860	**	**

### BEAM LOADING – P3000

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,290	0.07	1,290	1,290	1,290
36	860	0.15	860	860	590
48	650	0.26	650	500	330
60	520	0.41	420	320	210
72	430	0.59	290	220	150
84	370	0.80	220	160	110
96	320	1.04	170	120	80
108	290	1.32	130	100	70
120	260	1.63	110	80	50
144	220	2.34	70	60	40
168	180	3.19	50	40	30
192	160	4.17	40	30	NR
216	140	5.27	NR	NR	NR
240	130	6.51	NR	NR	NR

### MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel. All spot-welded combination members, except P1001T, are welded 3" (76 mm) maximum on center.

#### STEEL: PLAIN

12 Ga. (2.7 mm), 14 Ga.(1.9 mm) and 16 Ga. (1.5 mm)  
 ASTM A1011 GR33

#### STEEL: PRE-GALVANIZED

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and 16 Ga. (1.5mm)  
 ASTM A653 GR 33

For other materials, see Special Metals or Fiberglass sections.

### FINISHES

All channels are available in:

- Perma Green II (GR)
- Pre-galvanized (PG), conforming to ASTM A653 G90
- Hot-dipped galvanized (HG), conforming to ASTM A123
- Plain (PL)

Project: \_\_\_\_\_

Approval Stamp:

Architect / Engineer: \_\_\_\_\_

Date: \_\_\_\_\_ Phone: \_\_\_\_\_

Contractor: \_\_\_\_\_

Address: \_\_\_\_\_

Notes 1: \_\_\_\_\_

Notes 2: \_\_\_\_\_