



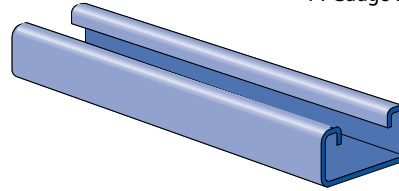

### P4100

Wt/100 Ft: 97 Lbs (144 kg/100 m)  
 Allowable Moment 1,330 In-Lbs (150 N•m)  
 14 Gauge Nominal Thickness .075" (1.9mm)

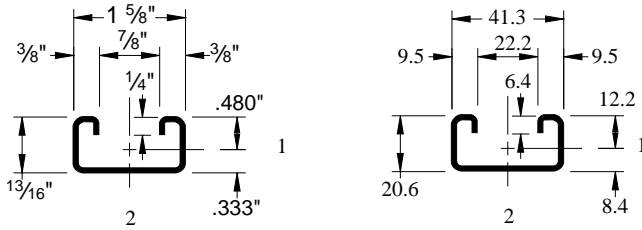

Channel Finishes:  
 PL, GR, HG, PG;  
 Standard Lengths:  
 10' & 20'

### COLUMN LOADING – P4100

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	1,620	5,670	5,210	4,530	3,810
36	1,300	4,620	3,810	2,770	1,940
48	1,000	3,450	2,450	1,570	1,090
60	760	2,380	1,570	**	**
72	600	1,650	1,090	**	**

### BEAM LOADING – P4100

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	440	0.11	440	410	270
36	300	0.24	240	180	120
48	220	0.43	140	100	70
60	180	0.68	90	70	40
72	150	0.98	60	50	30
84	130	1.33	40	30	20
96	110	1.74	30	30	20
108	100	2.20	30	20	10
120	90	2.71	20	20	10

### MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel. All spot-welded combination members, except P1001T, are welded 3" (76 mm) maximum on center.

#### STEEL: PLAIN

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and 16 Ga. (1.5 mm)  
 ASTM A1011 GR33

#### STEEL: PRE-GALVANIZED

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and 16 Ga. (1.5 mm)  
 ASTM A653 GR 33

For other materials, see Special Metals or Fiberglass sections.

### FINISHES

All channels are available in:

- Perma Green II (GR)
- Pre-galvanized (PG), conforming to ASTM A653 G90
- Hot-dipped galvanized (HG), conforming to ASTM A123
- Plain (PL)

Project: \_\_\_\_\_

Approval Stamp:

Architect / Engineer: \_\_\_\_\_

Date: \_\_\_\_\_ Phone: \_\_\_\_\_

Contractor: \_\_\_\_\_

Address: \_\_\_\_\_

Notes 1: \_\_\_\_\_

Notes 2: \_\_\_\_\_