




### PFL037 thru PFL050T

### Flange Clamp

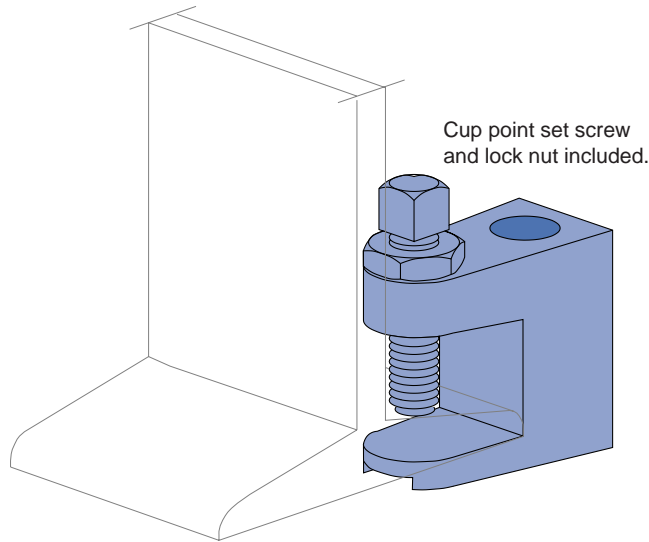


(When used for sprinkler systems only.)

Set Screw Torque = 6 Ft-Lb  
Lock Nut Torque = 16 Ft-Lb

Safety Factor: 5

Part Number	Rod Size	"Z" Set Screw Size	Wt/100 pcs Lbs (kg)	Max. Allowable Load Lbs (kg)
PFL037	3/8"	3/8"	28 12.7	540 244.9
PFL037T	3/8"	3/8"	28 12.7	540 244.9
PFL050	1/2"	3/8"	40 18.1	700 317.5
PFL050T	1/2"	3/8"	40 18.1	700 317.5

Material: Malleable Iron.

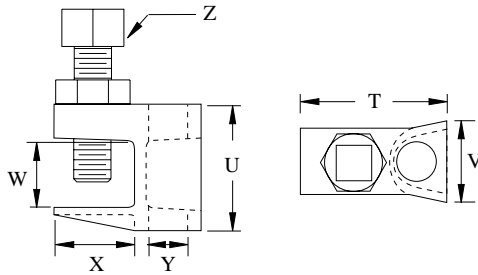

Part Number	Dimensions					
	"T" In (mm)	"U" In (mm)	"V" In (mm)	"W" In (mm)	"X" In (mm)	"Y" In (mm)
PFL037	1 11/16 42.9	1 1/16 39.7	7/8 22.2	3/4 19.1	1 25.4	7/16 11.1
PFL037T	1 11/16 42.9	1 1/16 39.7	7/8 22.2	3/4 19.1	1 25.4	3/8 Tapped Hole
PFL050	2 50.8	1 23/32 43.7	1 25.4	29/32 23.0	1 3/32 27.8	17/32 13.5
PFL050T	2 50.8	1 23/32 43.7	1 25.4	29/32 23.0	1 3/32 27.8	1/2 Tapped Hole

### MATERIAL

Fittings, unless noted, are made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many fittings are also available in stainless steel, aluminum and fiberglass. Consult factory for ordering information.

### FINISHES

Fittings are available in: Perma-Green II (GR), electro-galvanized (EG), conforming to ASTM B633 Type III SC1; Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 and plain (PL).

Project: \_\_\_\_\_

Approval Stamp: \_\_\_\_\_

Architect / Engineer: \_\_\_\_\_

Date: \_\_\_\_\_ Phone: \_\_\_\_\_

Contractor: \_\_\_\_\_

Address: \_\_\_\_\_

Notes 1: \_\_\_\_\_

Notes 2: \_\_\_\_\_